

FLANGE MAY BE LOCATED AT  
INTERIOR OR EXTERIOR OF  
LOUVER TO FIT CONDITIONS


NOTE:  
NOT RECOMMENDED FOR USE WITH  
MIAMI-DADE APPROVED PRODUCTS.

DESIGNER NOTE:  
THIS DETAIL IS A CONCEPTUAL DESIGN ILLUSTRATION  
ONLY. FASTENER SIZE AND SPACING MUST BE DESIGNED  
TO SPECIFIC APPLICATION REQUIREMENTS. NO WARRANTY  
OR GUARANTEE IS EXPRESSED OR IMPLIED.

CONTINUOUS INSTALLATION  
FLANGES SHIPPED LOOSE.  
SEE MAT'L NOTE.

HOLES FOR ATTACHMENT TO CONDITIONS  
(IF REQ'D) DRILLED IN FIELD NOT BY  
AIROLITE. ANCHORS NOT BY AIROLITE

FLANGES SUPPLIED WITH 7/32" DIA.  
HOLES AND #10 X 5/8" IND. HEX  
HEAD S.S. S.M. SCREWS FOR FLANGE  
ATTACHMENT TO LOUVER. LOUVER  
DRILLED IN FIELD NOT BY AIROLITE  
USING HOLES IN FLANGE AS TEMPLATE.

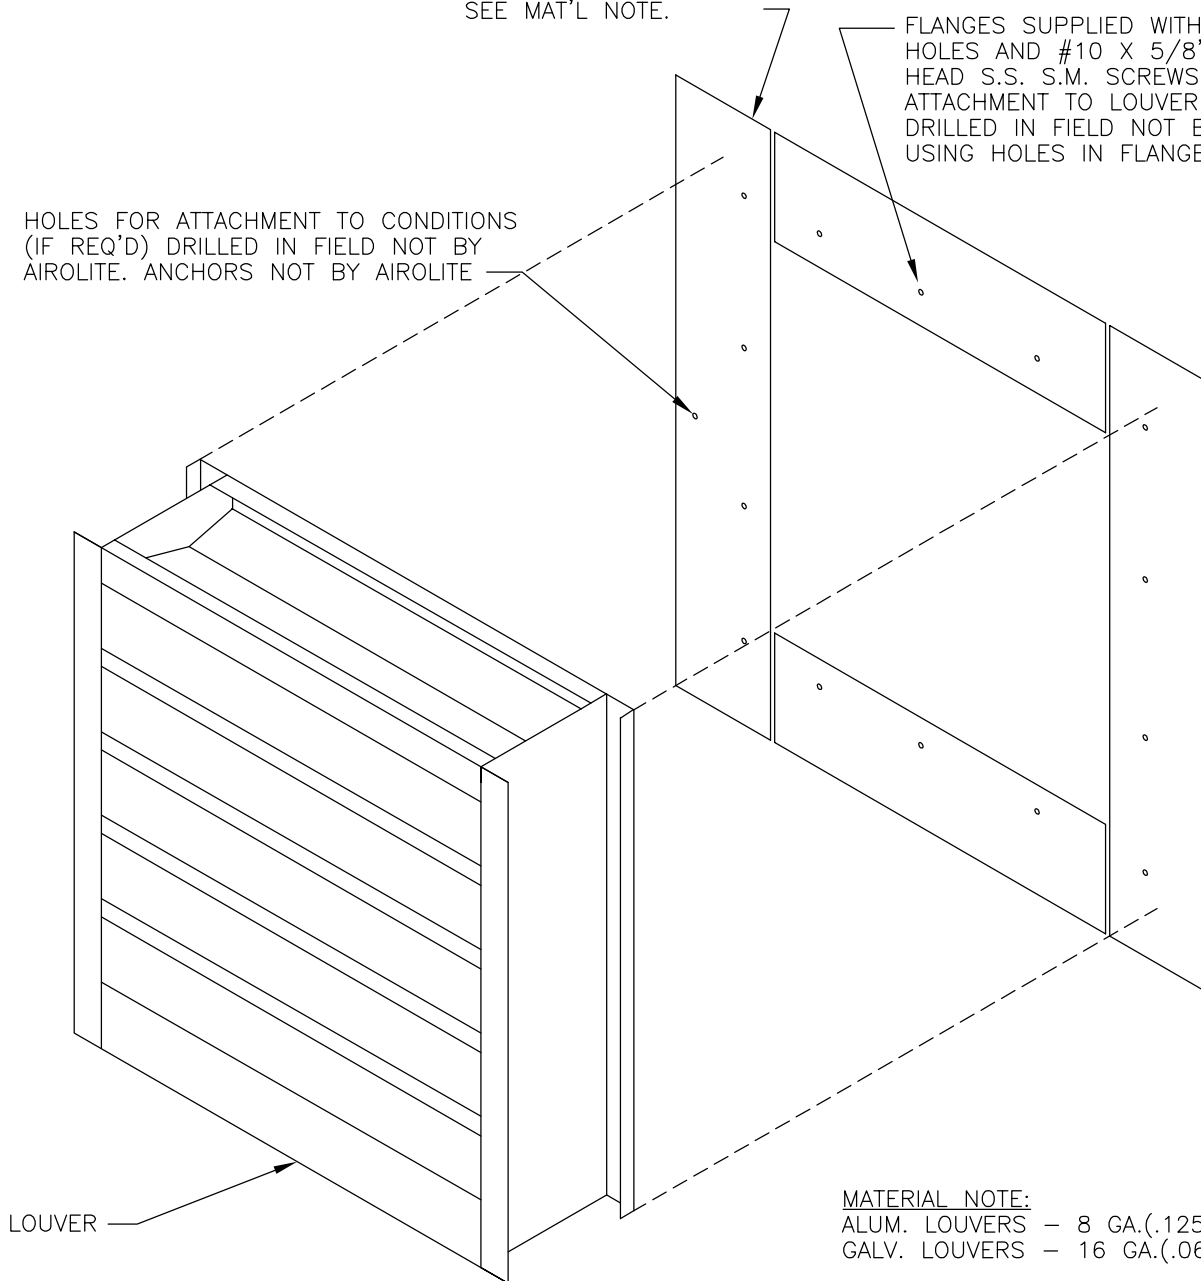

MATERIAL NOTE:  
ALUM. LOUVERS - 8 GA.(.125") ALUM.  
GALV. LOUVERS - 16 GA.(.063") GALV. STEEL



DRAWN BY:

SCALE: NONE

DATE: 4/97

**TYPICAL LOUVER DETAIL:  
METHOD OF INSTALLATION-  
PERIMETER FLANGE**

REV. NO: 0

FORM NO: 623021